SG 751 SAPR SWISS ARMS Precision Rifle

SAPR stands for SWISS ARMS Precision Rifle, and highly precise support is exactly what this weapon brings to Armed and Special Forces. Its rugged design is based on the legendary SIG 55X assault rifle family.

The SG 751 SAPR uses 7.62 mm x 51 (.308) caliber rounds to provide accurate and powerful support, especially for short and middle distances.



Barrel Options:

30 731 SAFR 3B. 303 IIIII / 14	
Overall length: 870 mm / Weight: 3,630 g (without magazine)	
SG 751 SAPR LB: 455 mm / 18"	
Overall length: 960 mm / Weight: 3,820 g (without magazine) SG 751 SAPR LB: 520 mm / 20"	
Overall length: 1,025 mm / Weight: 3,960 g (without magazine)	

SG 751 SAPR SR: 365 mm / 1/1"

SG 751 SAPR SB: 338 mm / 13" (with screw thread) available on request. Overall length: 843 mm / Weight: 3,580 g (without magazine)

> SG 751 SAPR LB: 406 mm / 16" (with screw thread) Overall length: 911 mm / Weight: 3,730 g

Technical Data SIG 751 SAPR

Caliber	Trigger pull weight	Weight of empty magazine	Function princ
7.62 mm x 51 NATO (.308)	35 N (3.5 kg)	140 g	Gas operate
No. of grooves	Cycle rate	Mag. weight with 20 rounds	Bolt pattern
6	approx. 650 rounds/min	480 g	Rotating bol

SAN 511 Precision Rifle

The SAN 511, Caliber 12.7x99mm (50. Bmg), has been especially designed as a high precision weapon for armies and law enforcement units. Its rugged design and modularity make it a perfect weapon for asymmetric engagements. Accurate, handy, powerful and operationally versatile,

this weapon suits operations for short, medium and long range assignments up to 2,000 m. It covers any military, special forces or LEO operation needs from EOD clearing to counter sniping missions.





- High precision on long distances

Options:

1 Cheek rest for buttstock: black, green or desert

4 Pistol grip + Plastic parts: black, green or desert

Options:

■ Folding butt

Rotating bolt

1 Suppressor (.308) 2 4-Rail for SG 751 SAPR 3 GL 75140

Standard Features:

4 position adjustable gas valve

Extremely low sight line (low silhouette)

Top Picattiny rail with emergency flip up sight

Foldable trigger guard (left or right) for shooting with

Cold hammer forged barrel

Single shot or full auto

4 Picatinny mount for rifle scopes 5 20-round magazine (with or without notches)

6 Brass catcher

7 Pistol grip in wood or in wood black color 8 Adjustable pistol grip in wood or in wood black color

9 Cheek rest for buttstock (only for standard buttstock)

10 Adjustable buttstock (available on request) 11 Special buttstock (available on request)

12 Single shot or full auto

13 Colours: black, green or desert

Standard Features:

■ High-robust construction

■ Salt-water resistant

Different models and versions on request.


2 Picatinny mount for rifle scopes


3 Suppressor (not available for 17,5" barrel)

5 5-round magazine or single shot adapter 6 Mildot Dial

Willdot Diai		
echnical Data SAN 511		
alibres & Twist	.50 BMG	381 mm
ange	Effective	1,600 m
	Within Range	1,850 m
	Max.	2,500 m
tock Adjustment	Length	75 mm
	Comb Height	29 mm
rigger Adjustment	Min.	1.7 kg
	Max.	2.2 kg
lagazine	Empty	0.58 kg
	Loaded w. 5 rounds	1.15 kg
luzzle Brake		0.72 kg
uppressor		2.6 kg
	0.A.D.	76 mm
	0.A.L.	500 mm

445 mm / 17.5" Barrel	SAN 511-1	1,110 mm / 11.8 kg	
	SAN 511-2	1,110 mm / 12.2 kg	
	Stock fully extended	1,185 mm	
	Stock Folded	850 mm	
	O.A.L. with Suppressor	1,270 mm	
560 mm / 22" Barrel	SAN 511-1	1,225 mm / 12.4 kg	
	SAN 511-2	1,225 mm / 12.8 kg	
	Stock fully extended	1,300 mm	
	Stock Folded	965 mm	
	O.A.L. with Suppressor	1,385 mm	
700 mm / 27.5" Barrel	SAN 511-1	1,360 mm / 13.4 kg	
	SAN 511-2	1,360 mm / 13.8 kg	
	Stock fully extended	1,435 mm	
	Stock Folded	1,110 mm	
	O.A.L. with Suppressor	1,520 mm	
815 mm / 32" Barrel	SAN 511-1	1,475 mm / 14.0 kg	
	SAN 511-2	1,475 mm / 14.5 kg	
	Stock fully extended 1,550 mm		
	Stock Folded	1,225 mm	
	O.A.L. with Suppressor	1,635 mm	
915 mm / 36" Barrel	SAN 511-1	1,575 mm / 14.6 kg	
	SAN 511-2	1,575 mm / 15.2 kg	
	Stock fully extended	1,650 mm	
	Stock Folded	1,325 mm	
	O.A.L. with Suppressor	1,735 mm	
Barrel w/o Muzzle Brake		445 mm / 3.31 kg	
		560 mm / 3.93 kg	
		700 mm / 4.93 kg 815 mm / 5.57 kg	
		915 mm / 6.21 kg	

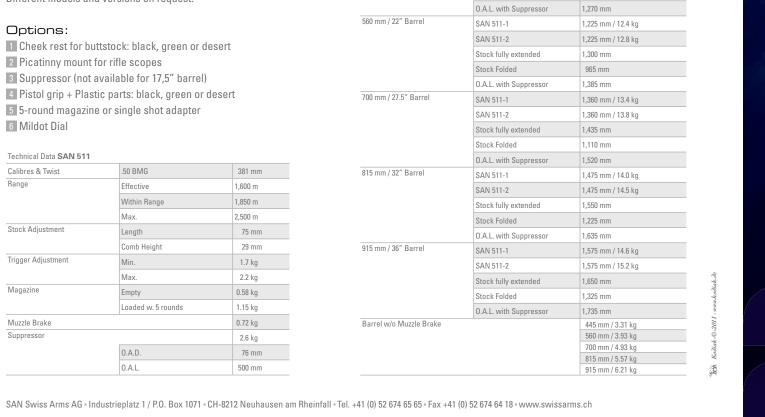

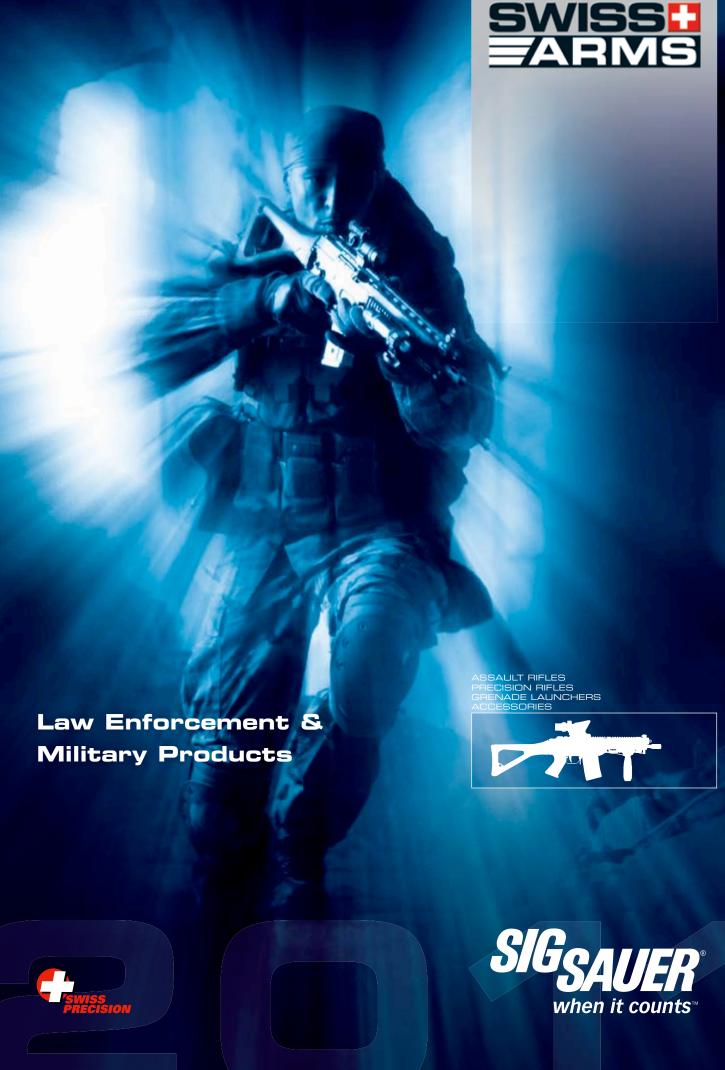

GLG 40 Grenade Launcher Gun



Technical Data GLG 40

Caliber	Overall length	Length with butt stowed	Barrel length	Rifling lead	No. of grooves	Sight base	Sight	Weight unloaded	Muzzle velocity	System o
40 mm	710 mm	480 mm	305 mm	1,200 mm	12	340 mm	folding leaf up to	2.5 kg	75 m/s	Single sh

GL 5040/5140/75140/5340 Grenade Launchers



Technical Data **GL 5040/5140/75140**

Caliber Overall length Barrel length Rifling lead No. of grooves Sight base Weight unloaded Muzzle velocity System of operation Technical Data GL 5340

Caliber Overall length Barrel length Rifling lead No. of grooves Sight base Weight unloaded Muzzle velocity System of operation 40 mm 376 mm 244 mm 1,200 mm 12 135 mm 1,570 g 75 m/s Single shot

ammunition from the same weapon.

Shown with optional accessories. • Products in this catalog are not available in this version on the U.S. market.


The Modular System

The whole rifle family shown in this catalog is based on a modular system. By changing and adding components each rifle model can be converted into one of its sister models or can be equipped with new features. With a moderate investment you can cover a wide field of applications and react flexibly to new challenges.

Firing Options:







Colour Options:









Barrel Options:







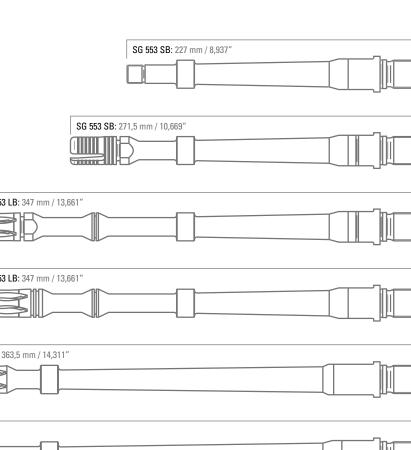

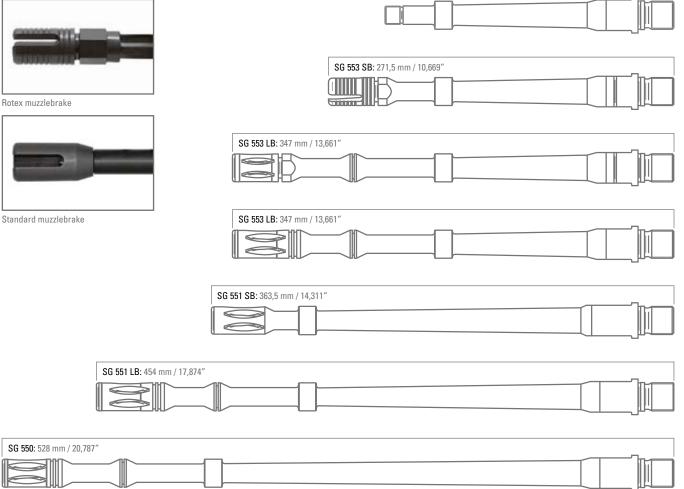

Standard Features: Compact, flexible design 2 position adjustable gas valve Rotating bolt ■ Cold hammer forged barrel Safety lever and magazine catch are ambidextrous operable

SG 553 LB

SG 553 SB

3 Upper reciever with Picatinny rail

4 Upper reciever with Picatinny rail &

5 Kit Diopter Rear Sight incl. Front Sight

8 Adjustable pistol grip in wood or in wood

Options:

1 Suppressor (.223)

dioptersight

black color

2 4-Rail for SG 551/553

6 Cheek rest for buttstock

(only for standard butt)



12 30-round magazine

14 Adjustable buttstock

(available on request)

13 Brass catcher

7 Pistol grip in wood or in wood black color 15 Special buttstock (available on request)

(with or without notches)







Swiss Arms assault rifles rank among the toughest and most versatile tactical arms in the world. The standard barer is the SG 550, proven when cover and speed count. The SG 550 utilizes a proven indirect gas operating system with rotating bolt that has proven its dependability and safety in the field time after time.



Standard Features:

= 2 position adjustable gas valve = Rotating bolt = Cold hammer forged barrel = Ambidextrous handling = Three firing modes - single shot, 3 round burst, full auto = Diopter rear site, flip up front sight = Foldable trigger guard (left or right) for shooting with gloves = Folding butt = Translucent polymer magazines, 30% lighter than metal = Detachable folding bipod

Technical Data

Caliber	Overall length	Overall height	Length with butt stowed	Barrel length	Rifling lead
5.56 mm (.223 Rem.)	998 mm	210 mm	772 mm	528 mm	178 mm, 254 mm
No. of grooves	Sight base	Weapon weight	Magazine capacity	Mag. weight with 20, 30 rounds	Combat weight with 120 rou
6	540 mm	4.1 kg	5, 10, 20, 30	340, 480 g	6.0 kg
Weight of empty mag. 20, 30	Trigger pull weight	Muzzel energy	Cycle rate	Function principle	Bolt pattern
95, 110 q	35 N (3.5 kg)	1,700 J	approx. 700 rounds/min	Gas operated	Rotating bolt

SG 551 SB

This gas-operated assault rifle was designed specifically for SWAT team tactical missions. Its minimal size and weight make it perfect for any military engagement, especially demanding law enforcement and maritime operations. Options include an adjustable drum diopter sight or Picatinny rail receiver with adjustable auxiliary iron sights.



Standard Features:

= Comes in standard and extended length barrels = 2 position adjustable gas valve = Rotating bolt = Cold hammer forged barrel

= Ambidextrous handling = Three firing modes - single shot, 3 round burst, full auto = Diopter rear site, flip up front sight = Foldable trigger guard (left or right) for shooting with gloves = Folding butt = Translucent polymer magazines, 30% lighter than metal

Caliber	Overall length	Overall height	Length with butt stowed	Barrel length	Rifling lead
5.56 mm (.223 Rem.)	833 mm	210 mm	607 mm	363 mm	178 mm, 254 mm
No. of grooves	Sight base	Weapon weight	Magazine capacity	Mag. weight with 20, 30 rounds	Combat weight with 120 rounds
6	466 mm	3.4 kg	5, 10, 20, 30	340, 480 g	5.4 kg
Weight of empty mag. 20, 30	Trigger pull weight	Muzzel energy	Cycle rate	Function principle	Bolt pattern
95, 110 g	35 N (3.5 kg)	1,460 J	approx. 700 rounds/min	Gas operated	Rotating bolt

SG 553 SB

Accurate, powerful and operationally versatile, this compact assault rifle is perfect for light close entry and close quarters combat. The SG 553 uses 5.56 mm x 45 NATO (.223 Rem.) caliber rounds for short and medium range assignments up to 300 meters. This rifle's terminal ballistic performance is far superior to the submachine gun.



Standard Features:

= Compact, flexible design = 2 position adjustable gas valve = Rotating bolt = Cold hammer forged barrel = Ambidextrous handling = Three firing modes single shot, 3 round burst, full auto = Diopter rear site, flip up front sight = Foldable trigger guard (left or right) for shooting with gloves = Folding butt ■ Translucent polymer magazines, 30% lighter than metal

Overall length	Overall height	Length with butt stowed	Barrel length (w/o flash suppressor)	Rifling lead
733 mm	210 mm	503 mm	230 mm	178 mm
Sight base	Weapon weight (w/o magazine)	Magazine capacity	Mag. weight with 20, 30 rounds	Combat weight with 120 rounds
339 mm	3.2 kg	20, 30	340, 480 g	Not available
Trigger pull weight	Muzzel energy	Cycle rate	Function principle	Bolt pattern
35 N (3.5 kg)	1,240 J	approx. 700 rounds/min	Gas operated	Rotating bolt
	733 mm Sight base 339 mm Trigger pull weight	733 mm 210 mm Sight base Weapon weight (w/o magazine) 339 mm 3.2 kg Trigger pull weight Muzzel energy	733 mm 210 mm 503 mm Sight base Weapon weight (w/o magazine) Magazine capacity 339 mm 3.2 kg 20,30 Trigger pull weight Muzzel energy Cycle rate	733 mm 210 mm 503 mm 230 mm Sight base Weapon weight (w/o magazine) Magazine capacity Mag. weight with 20, 30 rounds 339 mm 3.2 kg 20, 30 340, 480 g Trigger pull weight Muzzel energy Cycle rate Function principle

SB = Short barrel *LB = Long barrel *Shown with optional accessories. *Products in this catalog are not available in this version on the U.S. market.

SB = Short barrel • LB = Long barrel • Shown with optional accessories. • Products in this catalog are not available in this version on the U.S. market.